




外形及安装尺寸 Outline and mounting dimensions

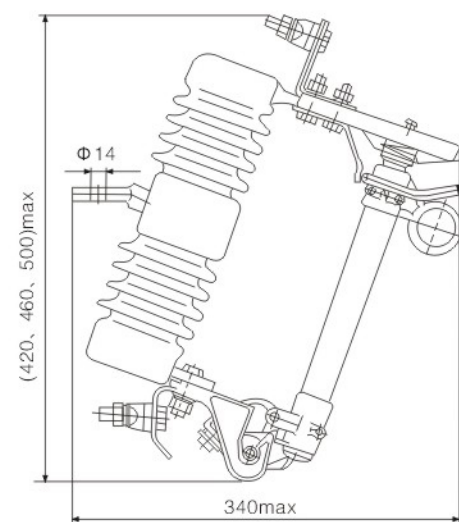


PRW8-12(II, III, IV)/100型熔断器
PRW8-12(II,III,IV)/100 dropout fuse

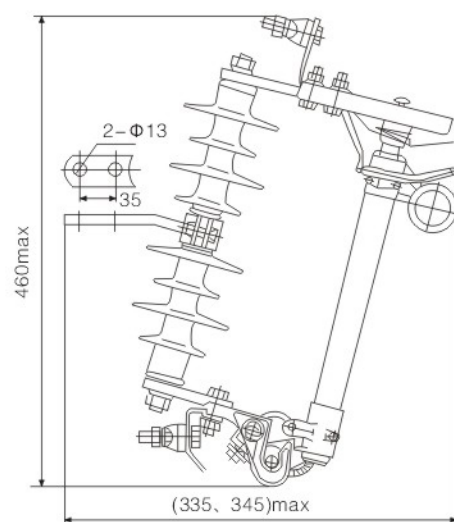


PRHW10-12/(100, 200)型熔断器
PRHW10-12/(100,200)dropout fuse

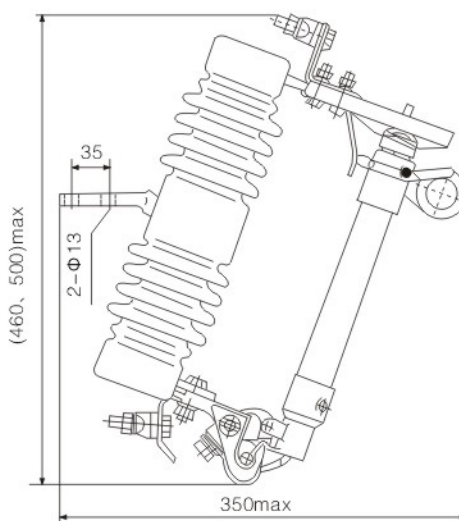


PRW8-12(III, IV)/200型熔断器
PRW8-12(II,IV)/200 dropout fuse

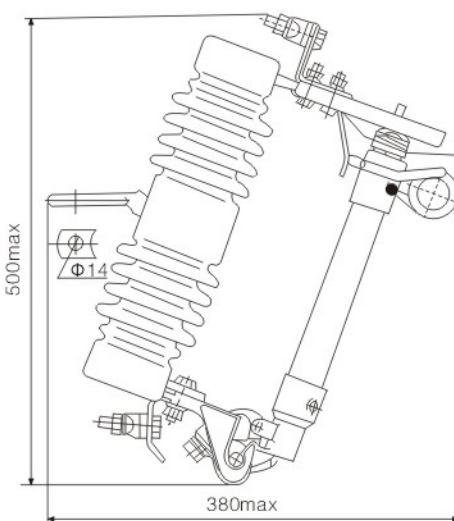

PRW8-(15-27)/100型熔断器
PRW8-(15-27)/100 dropout fuse

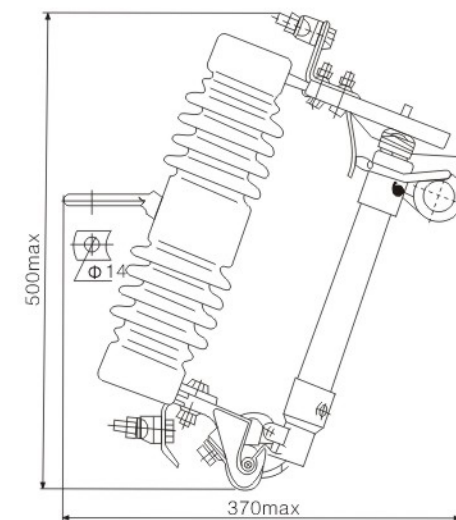

PRW8-(15-27)/200型熔断器
PRW8-(15-27)/200 dropout fuse

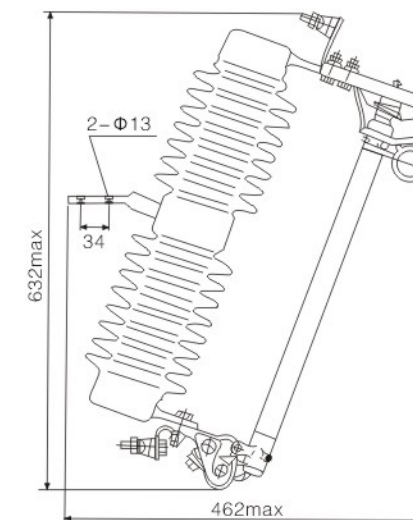

PRW8-40.5/100型熔断器
PRW8-40.5/100 dropout fuse



10kV-15kV

序号 No.	产品型号 Model	额定电压 Rated voltage	额定电流 Rated current	开断电流 Interrupting current	冲击电压 Impulse voltage	工频耐压 p.f withstand voltage	爬距 Creepage distance	重量 Weight	外形尺寸 Dimension
G0084	RW11-100	12	100	6300	100	42	230	7.8	48×12×31
G0085	RW11-200	12	200	8000	110	42	230	7.8	



24kV-27kV

序号 No.	产品型号 Model	额定电压 Rated voltage	额定电流 Rated current	开断电流 Interrupting current	冲击电压 Impulse voltage	工频耐压 p.f withstand voltage	爬距 Creepage distance	重量 Weight	外形尺寸 Dimension
G0086	PRW8-27/100	24	100	10000	150	65	470	13	56×38×10.5
G0087	PRW8-27/200	24	200	10000	150	65	470	13	